


FK MRT STOCK FENCING



CHARACTERISTICS

- Made with high tensile horizontal wires.
- Class A - Heavy galvanized wires according to EN 10244-2 standards.
- Progressive geometry as standard, non-progressive is an option.
- Horizontal wires come with crimps between each knot to add tension to the wire and assist with water run off.

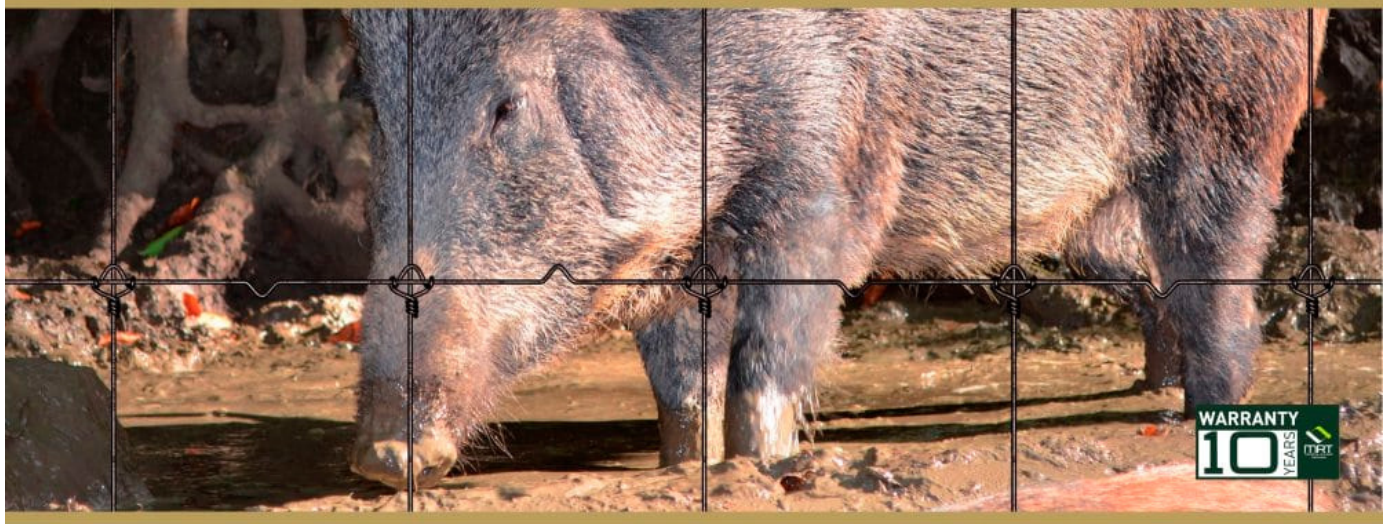

HEIGHT (mm)	HORIZONTAL WIRES		VERTICAL WIRES		KNOT WIRE	
	DIAMETER (mm)	RESISTANCE (Kg/mm ²)	DIAMETER (mm)	RESISTANCE (Kg/mm ²)	DIAMETER (mm)	RESISTANCE (Kg/mm ²)
From 1,000 to 3,000	2.50	123 - 142	2.50	70 - 97	2.24	45-55

OPTIONAL COATINGS

- Heavy galvanized + 2 lines Ecover®
- Heavy galvanized + Ecover®
- ZnAl®
- Other standards available (ASTM, SAE, BS, AS/NZS...)



ZnAl